

### 膜片式液泵 Oil-Free Diaphragm Pumps for Liquid

#### DL200DC 系列 (Series DL200DC)

#### 特点 Features

无油润滑 Oil-Free  
耐腐蚀性 Corrosionresistant  
免维护 Maintenance Free  
低噪音低振动 Low noise level&vibration  
可以任何方向安装 Can be mounted in any plane  
自吸功能 Self priming

结构紧凑 Compact size  
长寿命 Long life  
重量轻 Low Weight  
低功耗 High efficiency  
无刷直流 DCB Models  
可以干转 Dry running

#### 应用 Typical Applications

生化仪 Bio-Chemical Analyzer  
实验室设备 Lab equipment  
洗板设备 Microplate Washer  
环境检测 Air Sampler  
消毒柜 Autoclave  
医疗设备 Medical Applications  
液体分析 Liquid Analytical  
冷却设备 Cooling and Heating

污水处理 Sewage disposal  
喷绘打印 Wide-Format Printer  
生化仪 Bio-Chemical Analyzer  
电解质 Electrolyte  
美容设备 Beauty equipment  
化学分析 Chemistry analysis  
工业应用 Industrial Applications  
打印设备 Printing systems (ink)



### 技术参数 Technical Data


额定电压 Rated voltage	DC12V	DC24V
额定电流 Rated current	350mA	250mA
空载流量 Free flowing	240mL/M	240mL/M
扬程 Max Press. Height	8m WC	8m WC
最大吸力 Max Suction Height	3m WC	3m WC
使用温度 Ambient temperature	0- 40°C	0- 40°C
噪音 Noise	30dB	
重量 Weight	80G	

- 可以在任何方向安装使用 Can be mounted in any plane
- 气泵和液泵均可 applicable as gas pump or liquid pump

### 材质: Parts in contact with medium Option

- 泵头 Pump head: Polyarylamide Polyphenylensulfid (PPS)
- 膜片/阀片 Diaphragms, valves: NBR Viton, EPDM, Teflon

### 外形尺寸 Drawing (mm)

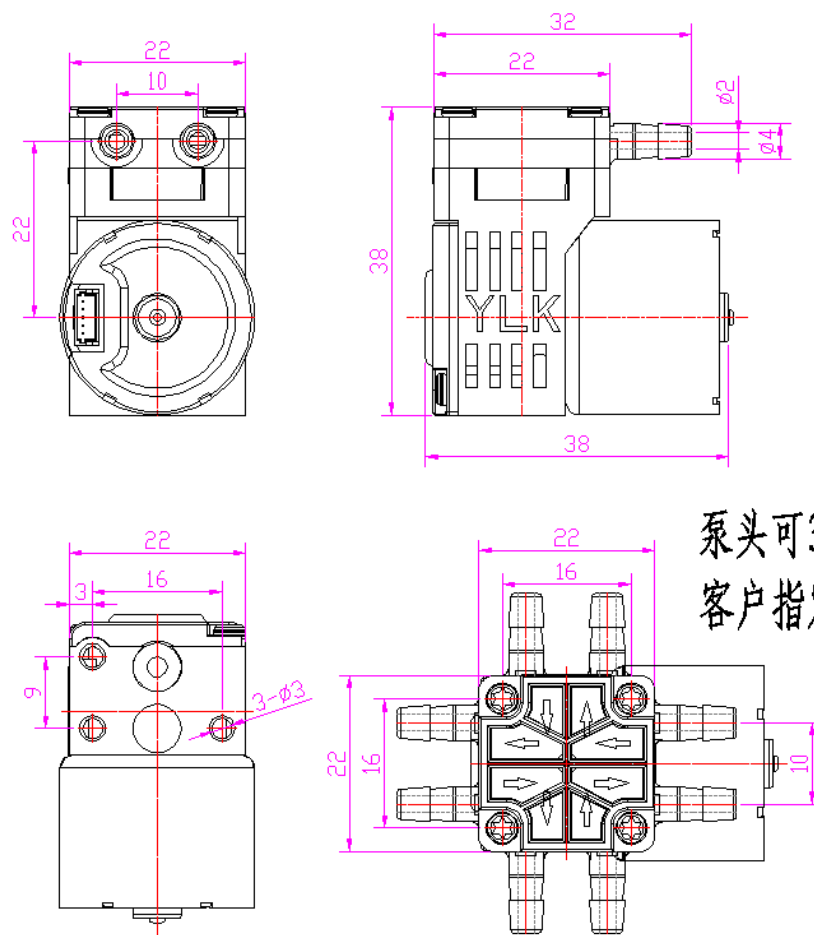

泵头可360° 旋转  
客户指定安装

可根据客户要求定做: We can design according to customer requirements

中国武汉市南京路135号金宝大厦10楼K座

Rm 10K, Jinbao Building, No.135, Nanjing Road, Wuhan, China

电话 Tel: (8627) 82201045 82201051

传真 Fax: (8627) 82791020 邮编 PC: 430010

www.ylktech.com ylktech@163.com