

膜片式气泵 Diaphragm Pumps for Gas

DA40DC-TH 系列(Series DA40DC-TH)

特点 Features


- 无油润滑 Oil-Free
- 耐腐蚀性 Corrosionresistant
- 免维护 Maintenance Free
- 低噪音低振动 Low noise level&vibration
- 可以任何方向安装 Can be mounted in any plane

- 结构紧凑 Compact size
- 长寿命 Long life
- 重量轻 Low Weight
- 低功耗 High efficiency
- 直流电机 DC Models

应用 Typical Applications

- 气体采样分析 Gas detection devices
- 监护仪 Patient Monitoring
- 血压计 Blood Pressure Monitor
- 气压按摩 Gas massage products
- 实验室设备 Lab equipment
- 洗板设备 Microplate Washer
- 环境检测 Air Sampler
- 止血带 Automatic Tourniquet

- 污水处理 Sewage disposal
- 喷绘打印 Wide-Format Printer
- 生化仪 Bio-Chemical Analyzer
- 电解质 Electrolyte
- 美容设备 Beauty equipment
- 化学分析 Chemistry analysis
- 真空吸取 Vacuum transfer
- 消毒柜 Autoclave

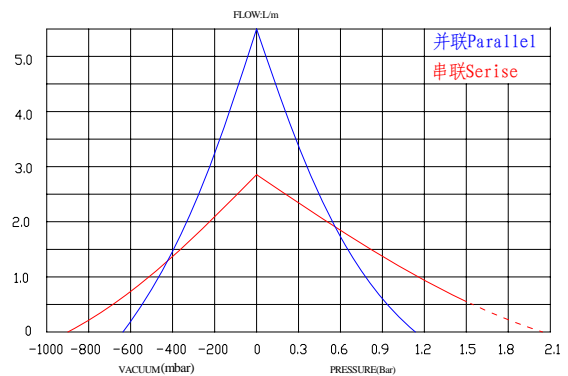

技术参数 Technical Data

额定电压 Rated voltage	DC12V 并联 P	DC12V 串联 S	DC24V 并联 P	DC24V 串联 S
额定电流 Rated current	600mA	600mA	300mA	300mA
空载流量 Free flowing	5.5L/M	2.8L/M	5.5L/M	2.8L/M
最大压力 Max. pressure	1.0Bar	1.6Bar	1.0Bar	1.6Bar
最大真空度 Max. vacuum	-65KPa	-90KPa	-65KPa	-90KPa
使用温度 Ambient temperature	0-40 °C	0-40 °C	0-40 °C	0-40 °C
重量 Weight	290G			

- 可以在任何方向安装使用 Can be mounted in any plane
- 真空和压力均可 applicable as vacuum pump or pressure pump

材质: Parts in contact with medium Option

- 泵头 Pump head: PA66 or PPS
- 膜片/阀片 Diaphragms, valves: EPDM



外形尺寸: Dimensions(mm)

