

膜片式气泵 Diaphragm Pumps for Gas

DA45DC-TH 系列(Series DA45DC-TH)

特点 Features

无油润滑 Oil-Free

耐腐蚀性 Corrosionresistant

免维护 Maintenance Free

低噪音低振动 Low noise level&vibration

可以任何方向安装 Can be mounted in any plane

结构紧凑 Compact size

长寿命 Long life

重量轻 Low Weight

低功耗 High efficiency

直流电机 DC Motor

应用 Typical Applications

气体采样分析 Gas detection devices

监护仪 Patient Monitoring

血压计 Blood Pressure Monitor

气压按摩 Gas massage products

实验室设备 Lab equipment

洗板设备 Microplate Washer

环境检测 Air Sampler

止血带 Automatic Tourniquet

污水处理 Sewage disposal

喷绘打印 Wide-Format Printer

生化仪 Bio-Chemical Analyzer


电解质 Electrolyte

美容设备 Beauty equipment

化学分析 Chemistry analysis

真空吸取 Vacuum transfer

消毒柜 Autoclave

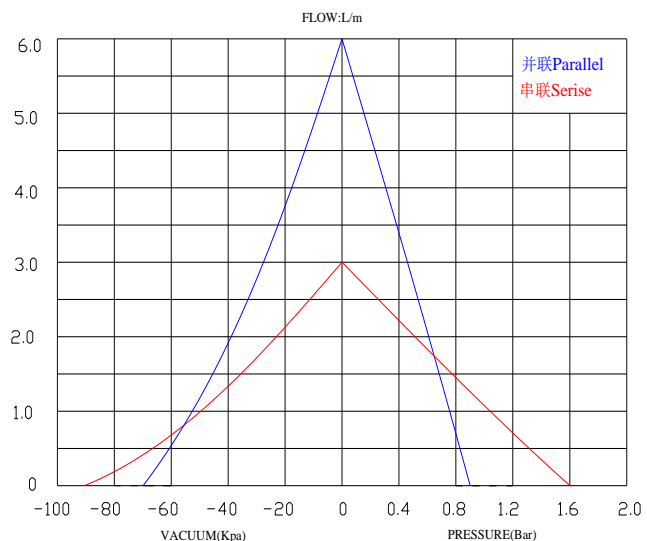

技术参数 Technical Data

P=Parallel

S=Serial

额定电压 Rated voltage	DC12V 并联 P	DC12V 串联 S	DC24V 并联 P	DC24V 串联 S
额定电流 Rated current	600mA	600mA	300mA	300mA
空载流量 Free flowing	6.0L/M	3.0L/M	6.0L/M	3.0L/M
最大压力 Max. pressure	0.85Bar	1.6Bar	0.85Bar	1.6Bar
最大真空度 Max. vacuum	-70Kpa	-90Kpa	-70Kpa	-90Kpa
使用温度 Ambient temperature	0-40℃	0-40℃	0-40℃	0-40℃
重量 Weight	340g			

- 可以在任何方向安装使用 Can be mounted in any plane
- 真空和压力均可 applicable as vacuum pump or pressure pump

材质: Parts in contact with medium Option

- 泵头 Pump head: PA66 or PPS
- 膜片/阀片 Diaphragms, valves: EPDM

外形尺寸: Dimensions(mm)

